
Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount 373 Series

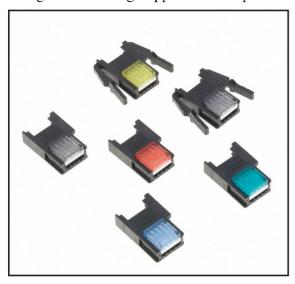

- Designed to accommodate typical wiring specifications per Japanese and Asian suppliers
- Latches available for Panel Mount applications
- No special wire preparation
- · Integrated cable retention
- Design accepts multiple wire size diameters
- Easy, quick, and reliable IDC termination using a standard pliers
- Debris free wire termination
- Accepts plug latches for a reliable interconnection in demanding applications
- · High number of mating cycles
- Compact design helps save board and panel space
- Helps reduce maintenance work by providing higher connection reliability
- See Regulatory Information Appendix (RIA) for chemical compliance information

Date Modified: September 18 , 2018

TS-2094-D Sheet 1 of 6

Physical

Insulation:

Material: Glass reinforced thermoplastic body and lower cover, transparent thermoplastic cover

Flammability: UL 94V-0

Color: Black body, cover—white and color (see Table 1)

Contact Material: Copper Alloy

Plating:

Underplating: 2.54 μm [100 μ"] minimum Nickel

Wiping Area: 0.2 μm [8 μ"] minimum Gold with Lubricant

IDC: Nickel

Accommodation: Annealed Copper, high-strength Copper or Copper Alloy. Bare, tinned, or tin

overcoated, $20 \sim 26$ AWG [$0.14 \sim 0.5$] stranded

Wire Insulation: Flexible vinyl, semi-rigid vinyl, x-linked polyethylene, or ETFE (see Table 1)

Marking: 3M Logo, Position Indicator, Wire Gauge, Insulator Material

Electrical

Current Rating: 3.0 Amps **Voltage Rating:** 32 Volts

Insulation Resistance: >1 x $10^6 \Omega$ at $600 V_{DC}$ **Withstanding Voltage:** $1,000 V_{RMS}$ at sea level


Environmental

Temperature Rating: 20°C to +85°C ambient (1.0 A max.)


-20°C to +75°C ambient (2.0 A max.) -20°C to +60°C ambient (3.0 A max.) (Note: UL rating is 65°C at 3.0A, 32V)

UL File No.: E68080


Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount

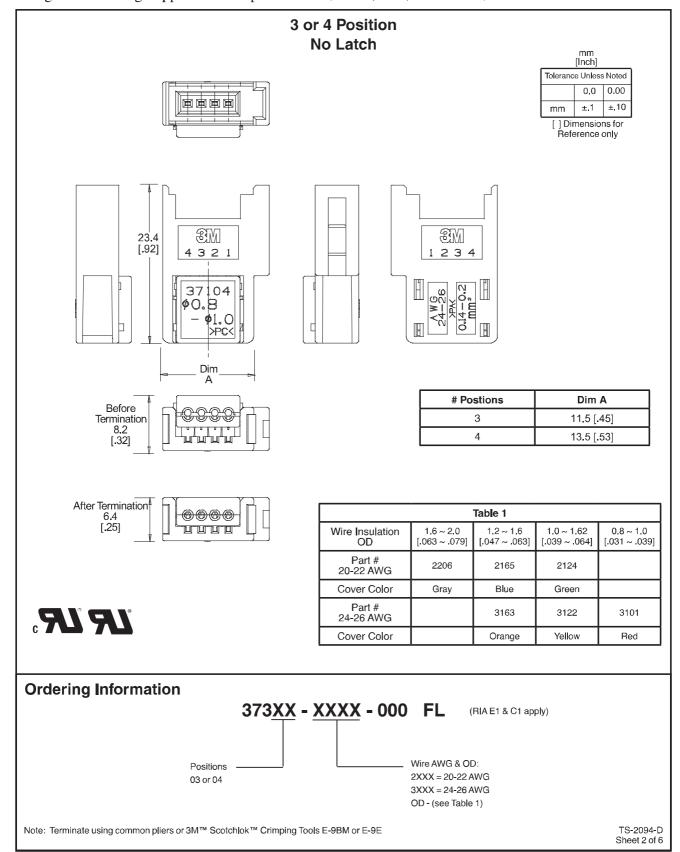


Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount

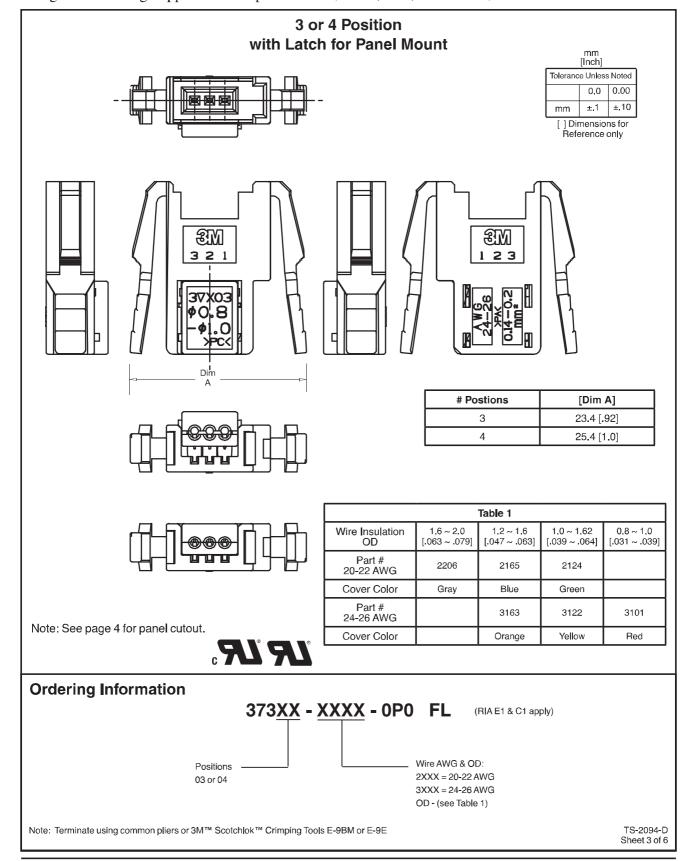

Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount 3'

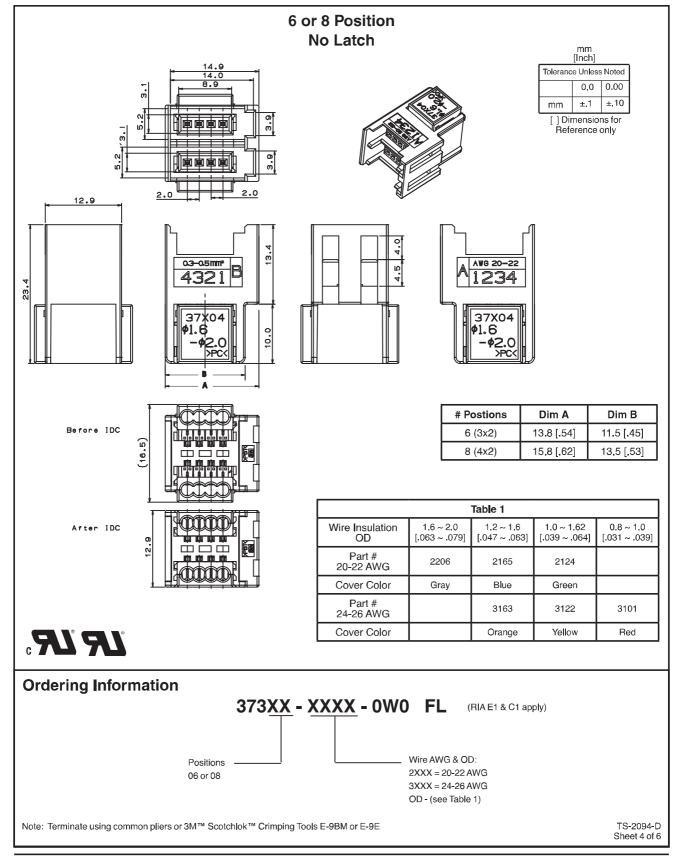


Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount

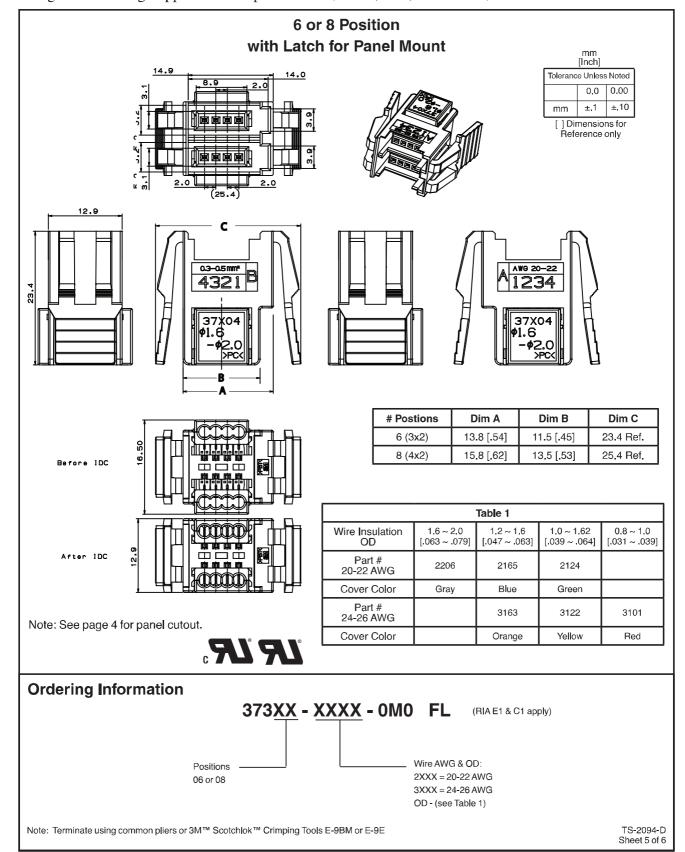


Designed for Wiring Supplied from Japan and Asia, 2 mm, IDC, Wiremount, Panel Mount

373 Series

Panel Cutouts



3 and 4 Pin 37303-XXXX-0P0 FL 37304-XXXX-0P0 FL

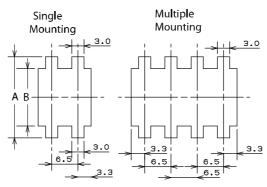

6 and 8 Pin 37306-XXXX-0M0 FL 37308-XXXX-0M0 FL

Table 2:			
	Panel Thickness in mm		
	1.0 to 1.2mm	1.4 to 1.6mm	
Pins	А	Α	В
03	20.0[0.79]	20.4[0.80]	14.2[0.56]
04	22.0[0.87]	22.4[0.88]	16.2[0.64]
06	20.0[0.79]	20.4[0.80]	14.2[0.56]
08	22.0[0.87]	22.4[0.88]	16.2[0.64]

TS-2094-D Sheet 6 of 6 Regulatory: For regulatory information about this product, visit 3M.com/regs or contact your 3M representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OR TRADE.

If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M Electronics Materials Solutions Division 6801 River Place Blvd. Austin, TX 78726-9000 1-800-225-5373 www.3M.com/interconnect



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

37308-2165-0W0-FL 37303-3163-0P0FL-100 37304-3101-0P0FL-100 37304-A124-00E-MB 37304-B163-00E-MB 37303-2124-0P0FL-100 37303-A124-00E-MB 37303-A206-00E-MB 37304-2124-0P0FL-100 37303-B101-00E-MB 37303-B163-00E-MB 37303-A165-00E-MB 37303-3101-000 FL 100 37303-2165-000 FL 100 37303-2206-000 FL 100 37304-2124-000 FL 100 37304-3101-000 FL 100 37303-2165-000 FL 100 37303-2165-000 FL 100 37303-2165-000 FL 37303-2124-000 FL 37303-2124-0P0 FL 37303-2124-0P0 FL 37303-2124-0P0 FL 37303-2124-0P0 FL 37303-3122-0P0 FL 37303-3163-0P0 FL 37303-3163-0P0 FL 37303-3101-0P0 FL 37304-3101-0P0 FL 37304-31